



USE	DIA. O.D (mm)	WALL TH.(mm)	MASS (Kg/m)	DESIGNATION
TOP RAIL	42.2	2.54	2.48	HSS *
LINE POSTS	48.3	3.17	3.53	HSS
END & GATE	73.0	4.78	8.04	HSS

\* HOLLOW STRUCTURAL SECTION CONFORMING TO CSA G40.21M, CLASS H.

**PIPE SCHEDULE**

**NOTES:**

- 1) LINE POSTS MAX. 3.00m SPACING.
- 2) TENSION BANDS MAX. 375mm SPACING.
- 3) FABRIC TIES TO TOP RAIL MAX. 450mm SPACING.
- 4) FABRIC TIES TO LINE POSTS MAX. 300mm SPACING.
- 5) PIPE MATERIAL & HARDWARE SHALL BE GALVANIZED STEEL.

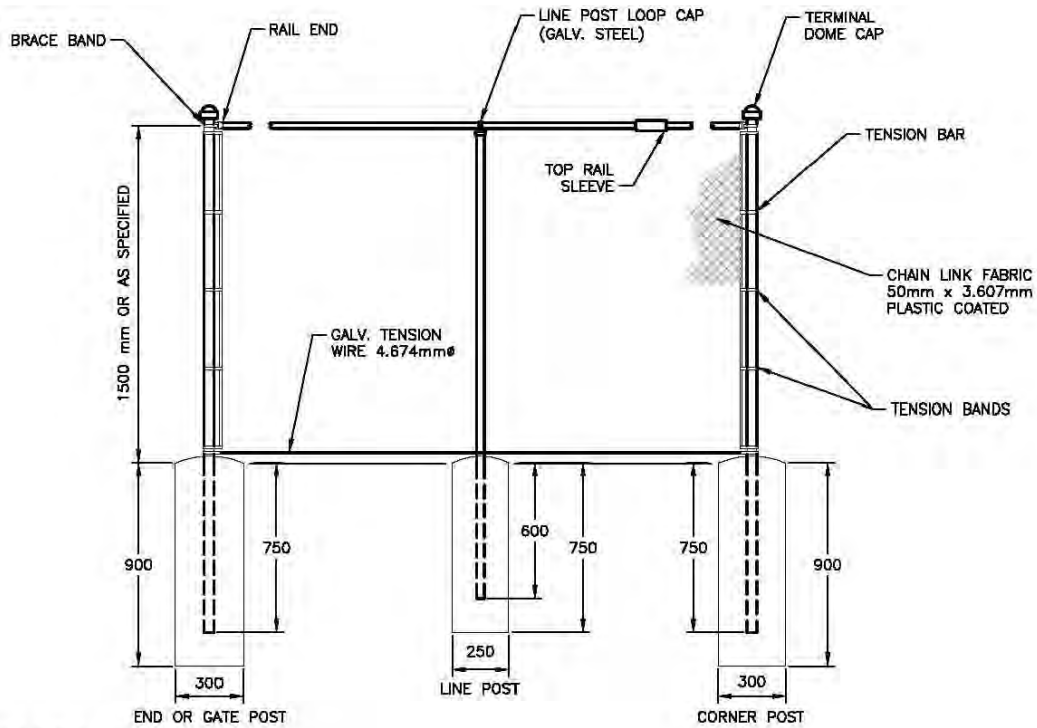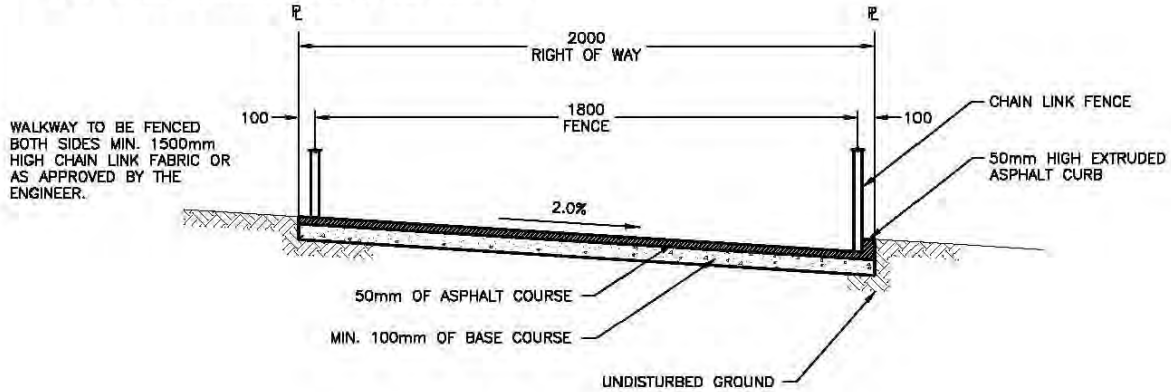

**NOTE:**

ALL DIMENSIONS SHOWN IN mm UNLESS OTHERWISE NOTED.

THE CORPORATION OF DELTA ENGINEERING DEPARTMENT <b>MINOR WALKWAY &amp;          CHAIN LINK FENCE</b>				DSN.	DRN. M.M.	DWG. No.
				CHKD.	APVRD.	<b>L 2.30</b>
				SCALE	N.T.S.	
				DATE	2014-03-13	RVSN.
DATE	REVISION	No.	BY			
REVISIONS						